

Legend:

			
3G Casing	SmartWay Verified	With TPMS Sensor	Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

Conti HDC 3

Construction Drive

 GOODS  PEOPLE  CONSTRUCTION




PRODUCT DATA

TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
11R22.5	H	05652410000	30	68	19.9	504	421	1069	11.7	298	12.7	322	8.25, 7.50	12.5	318	492	306	145	66	6610, 120 (3000, 830)	6005, 120 (2725, 830)
11R24.5	H	05652430000	30	68	20.7	526	441	1120	11.7	298	12.7	322	8.25, 7.50	12.5	318	469	292	153	70	7160, 120 (3250, 830)	6610, 120 (3000, 830)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Wide, aggressive open shoulder tread design with enhanced cap/base compounds for **improved mileage and traction.**



Diamond shaped lugs and optimal void volume for excellent traction.



Self-cleaning tread design and miniature stone bumpers reduce stone retention for enhanced retreadability.




Maximum sidewall protection for improved resistance against curbing, cuts and abrasions.



Embedded with **TPMS Active Sensor** Technology.

Intelligent Tire | Equipped with TPMS Sensor

- **Accurate, real-time** tire pressure and temperature readings
- **Sensor lasts 6 years / 400,000 miles** to minimize disruptions
- **Sensor provides true casing temperature** allowing preventive actions that make your tire last longer
- **Avoids valve damage and air leaks** by mounting on the inner liner

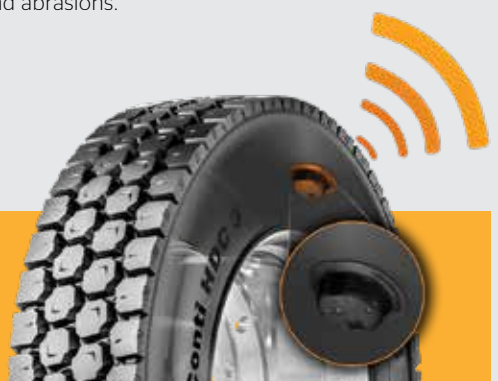

To get connected with one of our Digital Tire Monitoring Solutions, visit www.continental-truck.com.

Applications: Construction, coal haulers, logging, waste haulers and other on/off-road service.

CONSTRUCTION