


# DR444™

Highway drive radial optimized for long mileage and even wear.

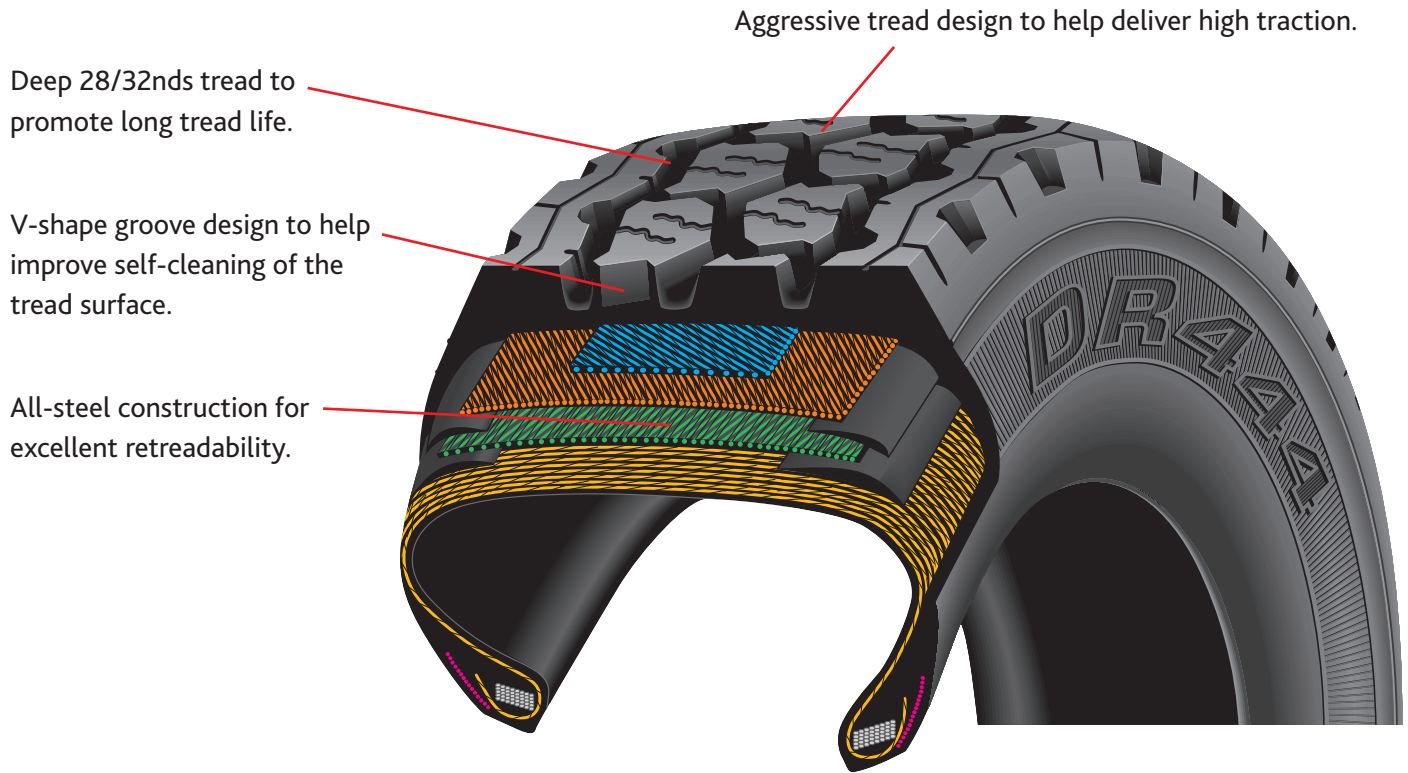

## Technical Data

Size	Load Range	Catalog Number	Tread Depth 32nds	Max. Speed (1) mph	Loaded Radius		Overall Diameter		Overall Width (2)		Approved Rims	Min. Dual Spacing (2)		Revs per Mile	Max. Load Per Tire Single				Max. Load Per Tire Dual			
					in.	mm.	in.	mm.	in.	mm.		in.	mm.		lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
11R22.5	G	77081	28	75	19.4	493	41.8	1062	11.2	284	8.25, 7.50	12.5	318	497	6175	105	2800	720	5840	105	2650	720
11R22.5	H	98035	28	75	19.4	493	41.8	1062	11.2	284	8.25, 7.50	12.5	318	497	6610	120	3000	830	6005	120	2725	830
11R24.5	G	52321	28	75	20.5	521	43.9	1116	11.0	279	8.25, 7.50	12.5	318	472	6610	105	3000	720	6005	105	2725	720
11R24.5	H	89861	28	75	20.5	521	43.9	1116	11.0	279	8.25, 7.50	12.5	318	472	7160	120	3250	830	6610	120	3000	830
275/80R22.5	G	90375	28	75	18.9	480	40.6	1032	10.9	277	8.25, 7.50	12.2	311	511	6175	110	2800	760	5675	110	2575	760
275/80R24.5	G	55617	28	75	19.5	495	41.9	1064	10.6	269	8.25, 7.50	12.2	311	500	6175	110	2800	760	5675	110	2575	760

Note: Rim listed first is the measuring rim.

(1) Exceeding the lawful speed limit is neither recommended nor endorsed.

(2) Tire section widths and overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly.

BFGoodrich® tires are subject to a continuous development program. BFGoodrich® Commercial Truck Tire reserved the right to change product specifications at any time without notice or obligation.

### ▲ Recommended Application

### △ Acceptable Application

