



Legend:


			
3G Casing	SmartWay Verified	With TPMS Sensor	Retread Available

PRODUCT FEATURES ABOVE ONLY APPLY TO PRODUCTS IF THE MATCHING ICON IS DARKENED.

HDR2

Regional Drive

 GOODS  PEOPLE  CONSTRUCTION

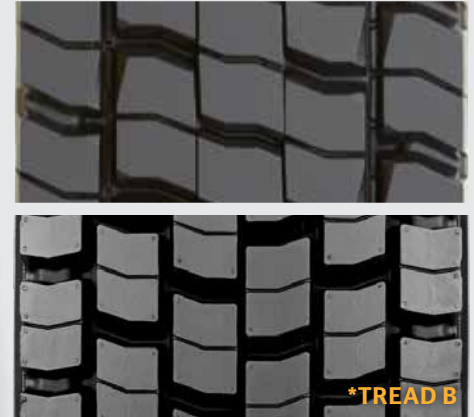

*TREAD B

PRODUCT DATA



TIRE SIZE	LOAD RANGE	ARTICLE NUMBER	TREAD DEPTH (32nds)	MAX SPEED (MPH)	STATIC LOADED RADIUS		OVERALL INFLATED DIAMETER		OVERALL INFLATED WIDTH		LOADED SECTION WIDTH		APPROVED RIM(S)	MINIMUM DUAL SPACING		REVS PER UNIT		TIRE WEIGHT		MAX. LOAD @ INFLATION	
					IN	MM	IN	MM	IN	MM	IN	MM		IN	MM	MI	KM	LB	KG	LBS, PSI (KG, KPa)	LBS, PSI (KG, KPa)
10R22.5	G	05221450000	24	75	19.0	483	40.4	1026	10.0	254	11.0	278	7.50, 6.75, 8.25	11.4	290	513	318	109	49	5675, 115 (2575, 790)	5355, 115 (2430, 790)
11R22.5	G	05220410000	30	75	19.8	502	42.2	1071	11.6	295	13.0	330	8.25, 7.50	12.5	318	491	305	136	61	6175, 105 (2800, 720)	5840, 105 (2650, 720)
11R22.5	H	05220420000	30	75	19.8	502	42.2	1071	11.6	295	13.0	330	8.25, 7.50	12.5	318	491	305	137	62	6610, 120 (3000, 830)	6005, 120 (2725, 830)
12R22.5	H	05221270000	30	75	20.3	515	43.2	1098	11.9	301	13.2	335	9.00, 8.25	13.5	343	479	297	148	67	7390, 120 (3350, 830)	6780, 120 (3075, 830)
295/75R22.5	G	05220440000	30	75	19.0	483	40.7	1034	11.5	292	12.9	328	8.25, 9.00	12.5	318	509	316	128	58	6175, 110 (2800, 760)	5675, 110 (2575, 760)
295/75R22.5	H	05220450000	30	75	19.0	483	40.7	1034	11.5	292	12.9	328	8.25, 9.00	12.5	318	509	316	129	58	7160, 120 (3250, 830)	6610, 120 (3000, 830)
11R24.5	H	05220430000	30	75	20.6	524	44.2	1123	11.6	295	13.0	330	8.25, 7.50	12.5	318	468	291	147	66	7160, 120 (3250, 830)	6610, 120 (3000, 830)
285/75R24.5	H	05220470000	30	75	19.6	498	42.1	1069	11.5	292	12.9	328	8.25	12.5	318	492	306	135	61	6780, 120 (3075, 830)	6175, 120 (2800, 830)
315/80R22.5* (Tread B)	L	05223660000	28	75	20.1	510	43.1	1096	12.3	312	13.5	342	9.00, 9.75	13.8	351	491	305	160	72	9090, 130 (4125, 900)	8270, 130 (3750, 900)

TUBELESS TIRES ON 15 DEGREE DROP CENTER RIMS

Note - Rim listed first is the measuring rim. Minimum Dual Spacing calculated without chains. * - ECE Certified # - Exceeding the lawful speed limit is neither recommended nor endorsed. Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width. Minimum dual spacing should be adjusted accordingly. 315/80R22.5 tires used on 8.25" rims are restricted to a maximum of 7610 lbs at 120 psi. Continental Tire the Americas, LLC reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturers load and inflation limits. Never exceed rim manufacturers limits without permission of component manufacturer.



Exceptional removal mileage and all-weather traction provided by **wide, open shoulder tread design**.

Optimized contour and **balanced footprint distribution** for extended tread life and product performance.



Chamfered tread block geometry to withstand higher drive axle torque with reduced drive tire wear conditions such as tearing and cracking.



Built on the **Conti 3G Casing** for maximum retreadability.

Applications: Regional and long haul drive positions. On/Off highway service.