Line Haul Drive Tire

UNIROYAL® LD2

A Smartway® line haul drive tire offering from an affordable brand you know and trust, with a history of keeping America rolling for more than 125 years.






Designed to:

Provide fuel efficiency and mileage performance with the use of advanced compounding

- Provide long wear with 31/32" tread depth
- Grip the road with tread siping and zig-zag groove for traction
- Reduce stone drilling with the use of variable groove walls

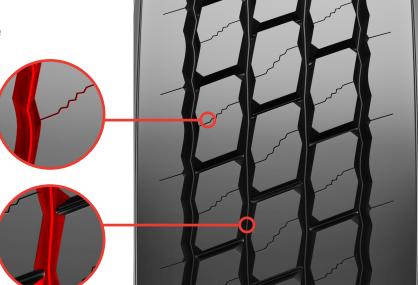

Size	Load Range	Catalog Number	Tread Depth	Max. Speed (*)		Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel	Min. Dual Spacing (‡)		Revs Per	Max. Load and Pressure Single				Max. Load and Pressure Dual			
			32nds	mph	kph	in.	mm	in.	mm	in.	mm	listed first.)	in.	in. mm	Mile	lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
11R22.5	Н	33594	31	75	120	19.3	491	41.7	1060	10.5	267	8.25, 7.50	12.5	318	502	6610	120	3000	830	6005	120	2725	830
295/75R22.5	G	05234	31	75	120	19.5	495	40.8	1037	11.1	282	9.00, 8.25	13.2	335	503	6175	110	2800	760	5675	110	2575	760

Note: Wheel listed first is the measuring wheel.

- (*) Exceeding the lawful speed limit is neither recommended nor endorsed.
- (‡) Overall width will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.
- (1) Based on internal tests against SmartWay® requirements. For more information on SmartWay® verified technologies, go to US: www.epa.gov/smartway or CA: https://www.nrcan.gc.ca.
- (2) Please see www.uniroyaltrucktires.com > Reference Documents > Warranties & Guarantees for details.

















Visit www.uniroyaltrucktires.com or To Find Your Nearest Uniroyal Commercial Truck Tire Dealer Call: United States, 1-866-357-6847; Canada, 1-888-871-7777

UNIROYAL® commercial truck tires and tubes are subject to a continuous development program. MNA, Inc. reserves the right to change product specifications at any time without notice or obligations. Copyright © 2022 MNA, Inc. All rights reserved.



