

MICHELIN® XDA®5+ TIRE



Longest wearing drive tire featuring regenerating tread features that deliver excellent traction late in life for line haul applications.



MICHELIN® XDA® 5+ TIRE



LINE HAUL & REGIONAL APPLICATIONS

Longest wearing drive tire featuring regenerating tread features that deliver excellent traction late in life for line haul applications.

Improved Fuel Efficiency⁽¹⁾ –

5% rolling resistance improvement over MICHELIN® XDA®5 tire
 • **Advanced Technology™**

Excellent Mileage –

Leading Tread Life

- **Solid shoulders** – Smooth wear
- **Wide footprint / Square shoulders** – Stability

Exceptional Handling –


Optimized Traction and Stability

- **Matrix™ Siping Technology** – Traction and stability
- **Regenerating tread features** – Late life traction

Extended Casing Life –

Longer life and retreadability

- **Full-width elastic protector ply** – Helps protect the working plies from bruising and penetrations, minimizing downtime.
- **Rectangular bead bundle** – A Michelin® exclusive - simulates a solid steel rod “strapping” the tire onto the wheel. This design stabilizes the entire bead region and minimizes fatigue in order to extend casing life.

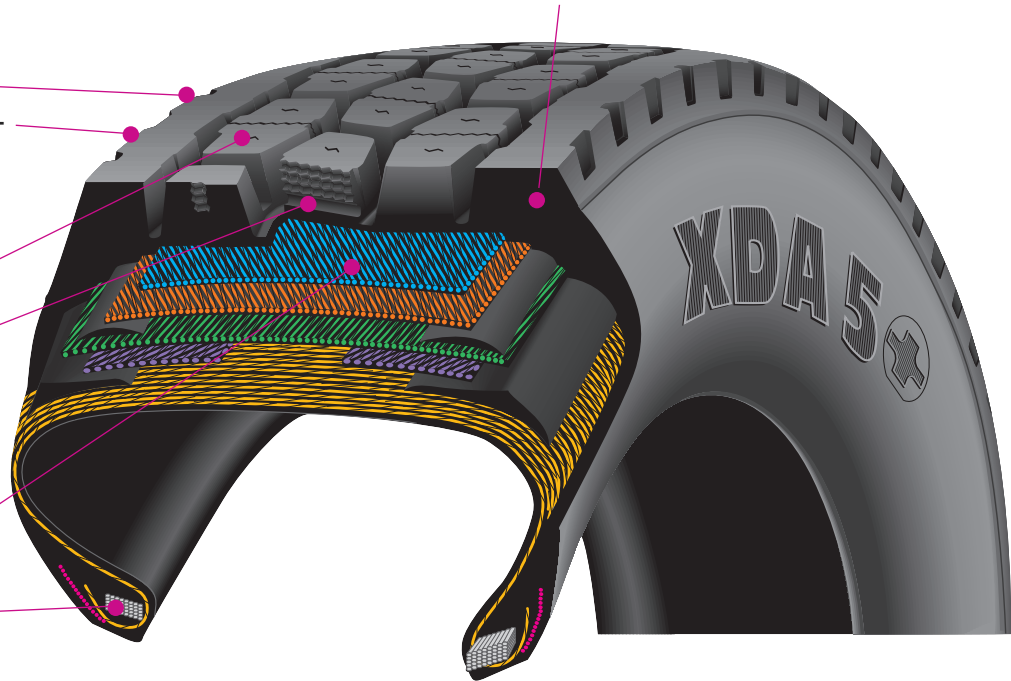

Size	Load Range	Catalog Number	Tread Depth 32nds	Max. Speed (*) mph	Loaded Radius		Overall Diameter		Overall Width (‡)		Approved Wheels (Measuring wheel listed first.)	Min. Dual Spacing (‡)		Revs Per Mile	Max. Load and Pressure Single				Max. Load and Pressure Dual			
					in.	mm	in.	mm	in.	mm		in.	mm		lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
11R22.5	G	14003	30	75	19.5	495	41.7	1058	11.3	287	8.25, 7.50	12.5	318	497	6175	105	2800	720	5840	105	2650	720
275/80R22.5	G	61310	30	75	19.0	483	40.6	1031	11.1	281	8.25, 7.50	12.2	311	510	6175	110	2800	760	5675	110	2575	760
11R24.5	H	97973	30	75	20.6	523	43.8	1113	11.3	287	8.25, 7.50	12.5	318	471	7160	120	3250	830	6610	120	3000	830
275/80R24.5	G	01376	30	75	19.7	499	41.8	1062	10.8	273	8.25, 7.50	12.2	311	494	6175	110	2800	760	5675	110	2575	760
305/75R24.5 ⁽²⁾	J	30987	30	75	20.1	510	43.3	1100	11.5	293	8.25, 9.00	13.5	343	480	8270	120	3750	830	7160	120	3250	830

Note: Wheel listed first is the measuring wheel.

(1) Based on industry standard rolling resistance testing of comparable tires or retreads. Actual results may vary, and may be impacted by many factors, to include road conditions, weather and environment, driver performance, etc.

(2) MICHELIN® XDA®5 tread design. Limited Availability.

(*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations. Please consult wheel manufacturer's load and inflation limits. Never exceed wheel manufacturer's limits without permission of component manufacturer.

www.michelintruck.com

United States

Michelin North America, Inc.
 One Parkway South
 Greenville, SC 29615
 1-888-622-2306

Canada

Michelin North America (Canada), Inc.
 2500 Daniel Johnson, Suite 500
 Laval, Quebec H7T 2P6
 1-888-871-4444

Mexico

Industrias Michelin, S.A. de C.V.
 Av. 5 de febrero No. 2113-A
 Fracc. Industrial Benito Juarez
 7 6120, Querétaro, Qro. Mexico
 011 52 442 296 1600